





Besteman Techno Support

Potato Cold Fog Resonator LVM H1-H2-H3-H5

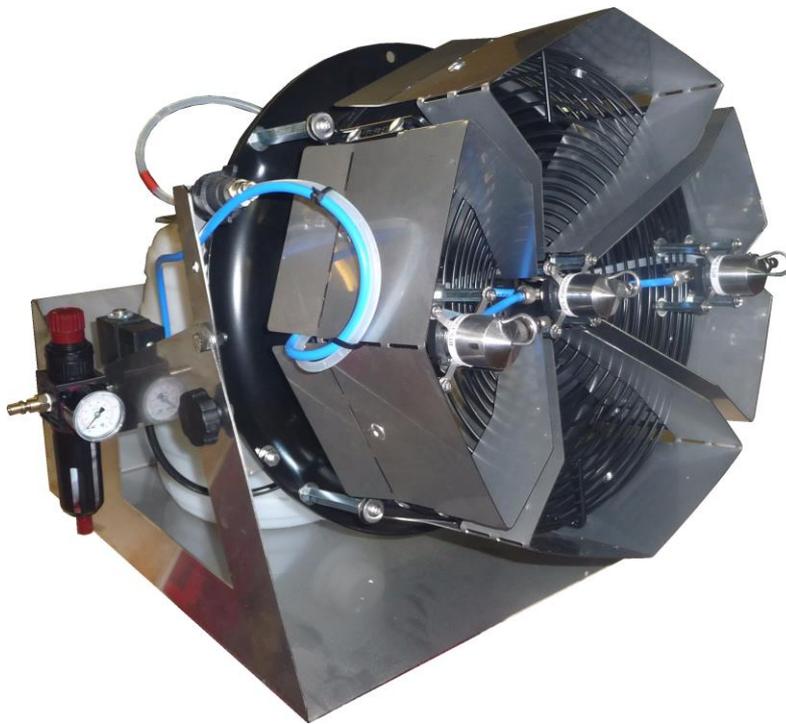

De Potato Resonator LVM A3

- The finest Cold mist
- A large liquid capacity
- Little air consumption

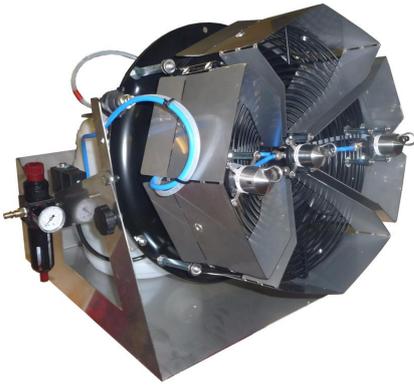

Gegevens:


power supply	: 220/230 volt
compressed air consumption	: 5,5 bar at 75ltr/min each sprayer
power consumption	: 120 Watt
diameter fan	: 30 cm
Max. air displacement	: 85 m ³ / min

COLD FOG RLVM H3

The droplet size depends on the quantity of liquid per hour.
At 4.5 bar, the maximum volume of the drops 0 to 8 microns. The number of particles per square centimeter will therefore be higher. This product becomes the more enclosed, with the result: easier and faster absorption by the product.

Droplet Spectrum measurement prototype, ColdFog Resonator LVM.

Nevelbundel Coldfog

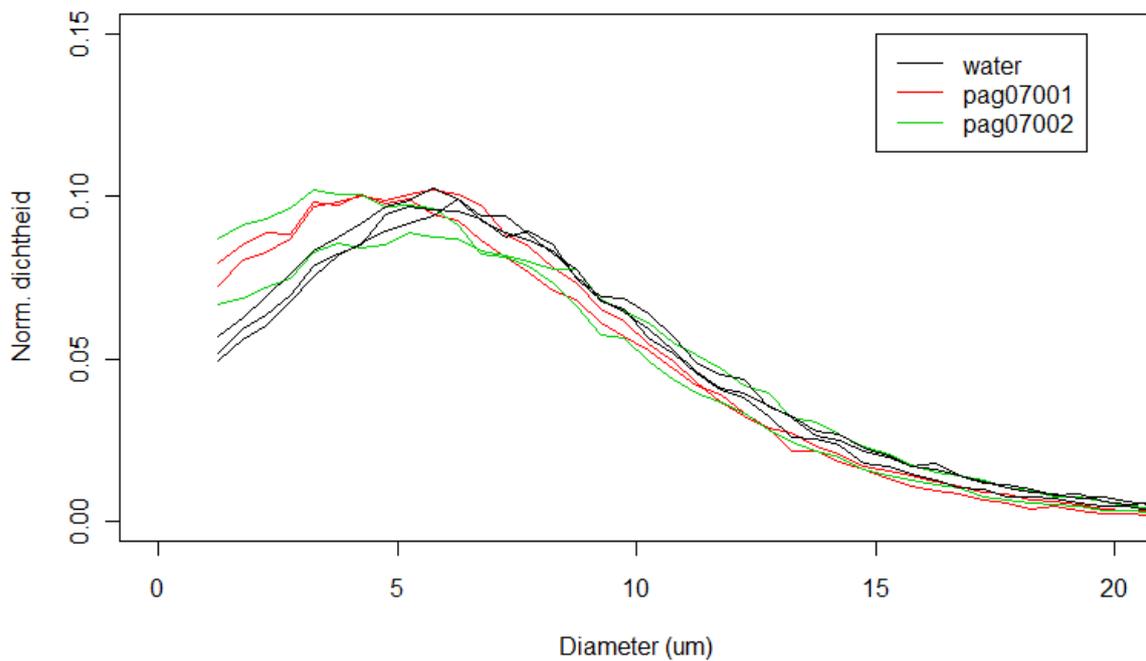

Benefits Hot Fog Resonator LVM

- Easy operation
- The Resonator is already mists when the plug into the outlet.
- Improved spray distribution by a fan
- Shorter treatment time increased capacity.
- Optimal operation by means of rapid transfer fluid in the space
- By fineness of the spray liquid penetrates evenly into the product
- No combustion gases
- No CO2
- No wet product
- Large density of particles of active ingredient per 1m3
- Smoother surface liquid distribution means the product
- Product gets more time to draw at least by weight of the particles particles to itself
- Filtering liquid atomization
- Capacity of up to 12 liters. per hour
- To treat about 1,000 tons of potatoes with a device

Option: the ability to steer these ColdFog automatically

Resonator LVM

- Good working compressor needed, with enough capacity.
- Check Resonator for use
- Well setting of air / fluid delivery

Improving fineness of the fog is one of the recommendations in the potato store to come. to a good outcome of anti-sprouting In addition, the fan RLVM ensure a good distribution and better evaporation of the mist in the surface to be treated.

A slowly rotating fan with a large capacity to ensure proper mixing of fog in the free space of the storage cell or potato.

Option: To get an even better distribution for wider storage can put the Resonator on a turntable. This can be set at any angle and for sale at BTS

Option: The Resonator can be connected to a computer with automatic liquid transport. . The liquid is transported by a peristaltic pump to the resonator

You can check the used liquid by controlling out of the storage. You know what the peristaltic pump pumped per unit

When the spraying time is over the fog machine is coving out and the peristaltic pump is stopped.

The Hotfog Resonator LVM A1 equipment can now be ordered
The delivery time may vary due to the stock.

The price of a Potato GOLDFOG RLVM as follows to display.

ARTICLE NO.	Name	PRICES SPRAYERS	+/-LITER PER UUR
5003117H1	POTATO RLVM H1	1535,- one sprayer	2 to 4 liter each hour
5003117H2	POTATO RLVM H2	1995,- two sprayers	4 to 8 liter each hour
5003117H3	POTATO RLVM H3	2630,- tree sprayers	6 to 12 liter each hour
DB 100 FLT-WDB	TURNTABLE 850,-		

Besteman Techno Support B.V.
Molenlei 1-H
1921 CX Akersloot
T: +31 (0)6 - 537 531 06
F: +31 (0)84 - 740 66 92
E: info@bestemantechnosupport.nl
K.v.K nr: 57943001